



Frameless Fans

50 x 50 x 10 mm IV


SPECIFICATIONS




- Bearing Type:
2 Ball Bearing
- Material
Impeller: PBT85%+FIBER15%
(UL 94V-0)
Frame: PBT70%:+FIBER30%
(UL 94V-0)
- Lead Wires:
UL 1007-F
AWG #24 (2 Pin), #28 (3 Pin)
(+) Red, (-) Black
- Weight: 9 Grams (0.32 oz)
- Standard: 3-Wire, Tacho output,
12" wire
- Available: 2-Wire
Locked rotor
Connector

* Specifications are subject to change without notice.

P & Q CURVE (AT RATED VOLTAGE)

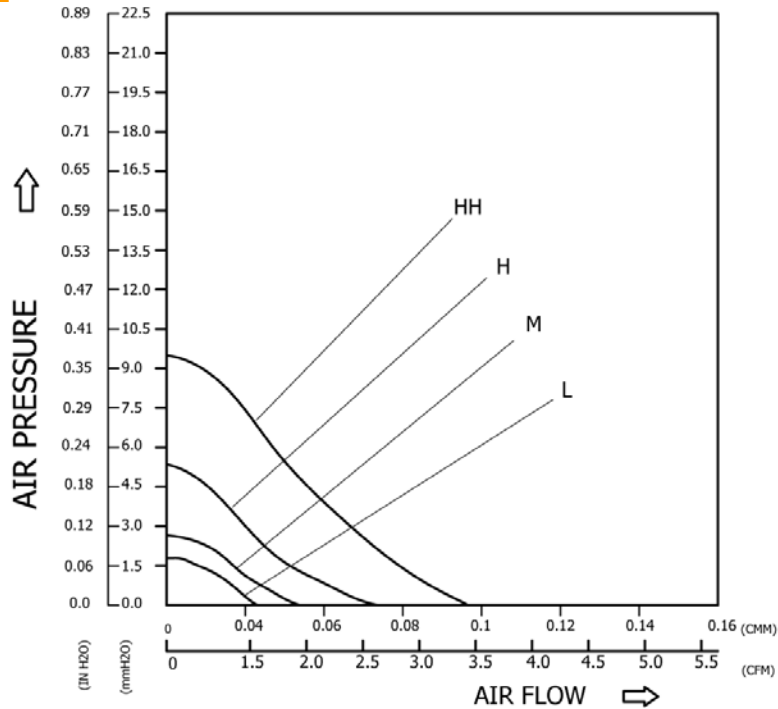

DIMENSIONS DRAWING

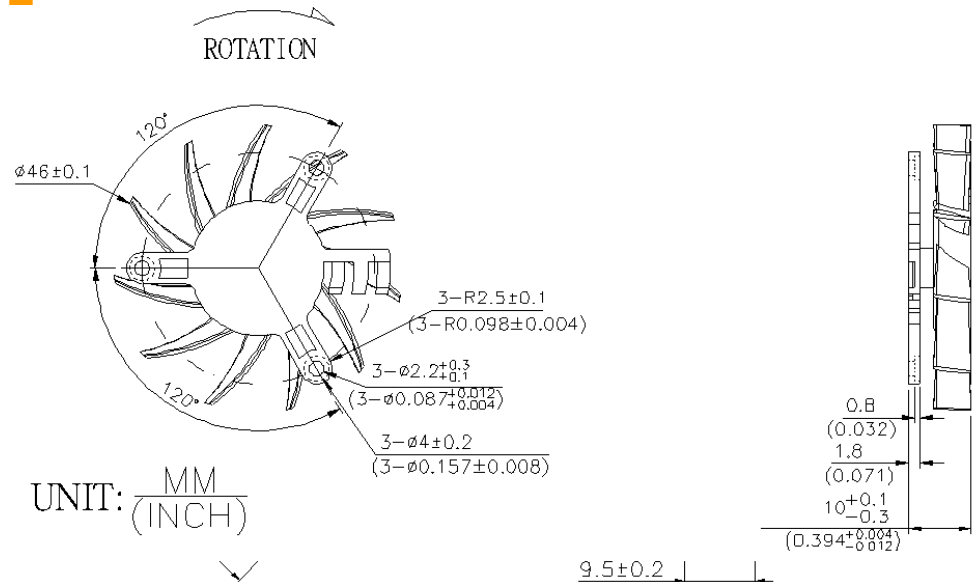

UNIT: $\frac{MM}{(INCH)}$

Model No.	Rated Voltage [V]	Operating Voltage [V]	Rated Current [A]	Actual Current [A]	Rated Power [W]	Rated Speed [RPM]	Max. Air Flow		Max. Static Air Pressure		Noise Level [dBA]	Noise Level Max [dBA]
							CMM	CFM	mmH ₂ O	INH ₂ O		
F-5010L12B IV	12	9-13.8	0.08	0.05	0.96	2500	0.061	2.16	2.61	0.103	19.464	
F-5010M12B IV	12	9-13.8	0.11	0.06	1.32	3000	0.072	2.56	3.93	0.155	21.522	