



Frameless Fans

70 x 70 x 10 mm III


SPECIFICATIONS




- Bearing Type:
2 Ball Bearing
- Material
Impeller: PBT85%+FIBER15%
(UL 94V-0)
Frame: PBT70%:+FIBER30%
(UL 94V-0)
- Lead Wires:
UL 1007-F
AWG #24 (2 Pin), #28 (3 Pin)
(+) Red, (-) Black
- Weight: 16 Grams (0.56 oz)
- Standard: 3-Wire, Tacho output,
12" wire
- Available: 2-Wire
Locked rotor
Connector

* Specifications are subject to change without notice.

P & Q CURVE (AT RATED VOLTAGE)

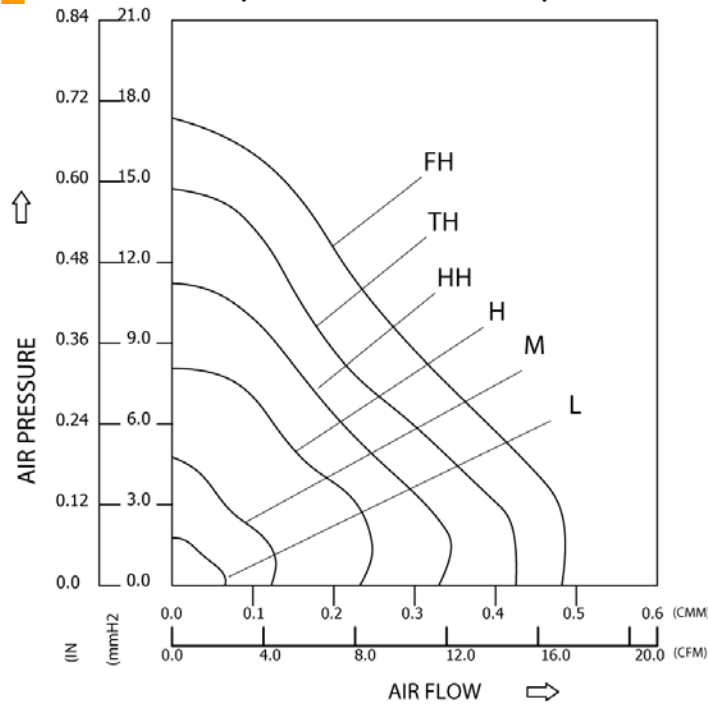

DIMENSIONS DRAWING

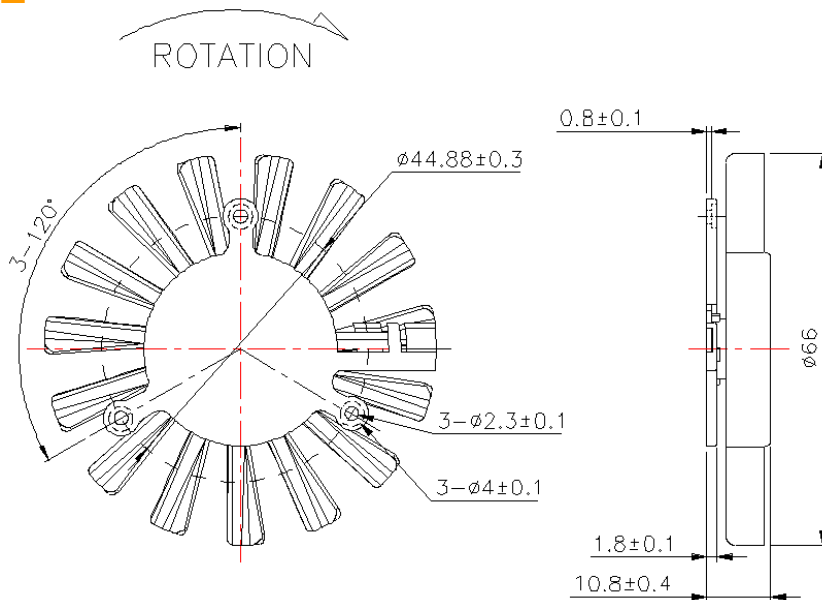

Model No.	Rated Voltage [V]	Operating Voltage [V]	Rated Current [A]	Actual Current [A]	Rated Power [W]	Rated Speed [RPM]	Max. Air Flow		Max. Static Air Pressure		Noise Level [dBA]	Noise Level Max [dBA]
							CMM	CFM	mmH ₂ O	INH ₂ O		
F-7010L12B III	12	9-13.8	0.20	0.04	2.40	1500	0.098	3.45	2.14	0.084	23.1	23.5
F-7010M12B III	12	6-13.8	0.25	0.10	3.00	2000	0.168	5.95	4.45	0.175	24.0	24.2
F-7010H12B III	12	6-13.8	0.30	0.14	3.60	2500	0.193	6.82	8.00	0.315	28.8	30.2
F-7010HH12B III	12	6-13.8	0.39	0.15	4.68	3000	0.207	7.32	11.30	0.445	32.6	35.1